


Install one spare 50 mm conduit and cap; others as required.

Locate conduits centrally in foundation


PAD MOUNT

NOTES

- Where pad or pedestal mounts are located in a sidewalk, construct mount top flush with sidewalk grade, omitting chamfer where top and sidewalk abut.
- Pad mount design is typical.
- Place a silicone seal between the cabinet foundation and the cabinet for the pad mount design.

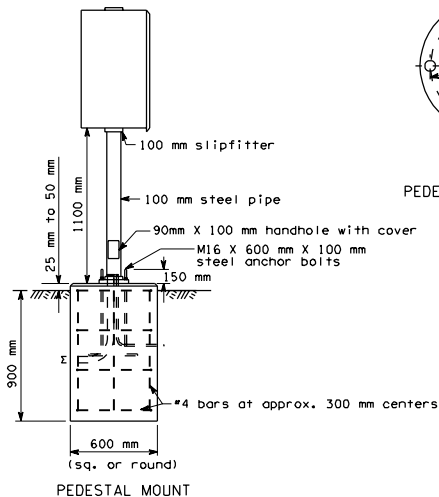

PEDESTAL MOUNT

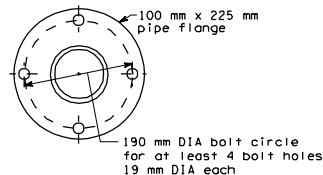

PEDESTAL BASE DETAILS

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

CABINET FOUNDATION DETAILS